



S.Y. Wong CEng MIEE


DN-WLAN-004
July 2003

Office and Campus Wireless Broadband Setup Quick Reference

Special points of interest


- Showing you the physical cable connection of the wireless AP Router and the office or campus LAN port
- Setting the wireless AP Router for either the “Automatic Configuration—DHCP” or “Static IP” according to your wired LAN configuration
- Verifying the broadband connection

In office or Campus, you probably won't need to subscribe to an ISP for broadband access because it's already there at the LAN ports. To extend your wired LAN to wireless, you will simply connect your it to the wireless AP Router, with either a Dynamic IP or a Static IP configuration. We are going to talk about it in the following paragraphs.

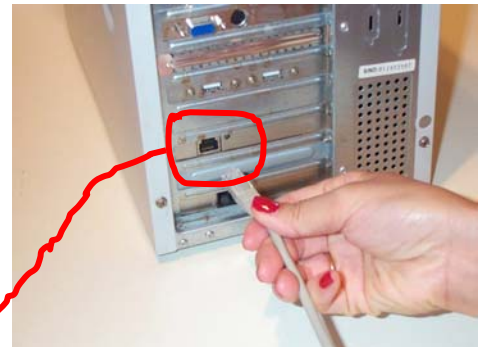

STEP 1 - Unplug the RJ45 Ethernet Cable that runs from the office or campus LAN port

Connecting the Office or Campus Ethernet port to Wireless AP Router

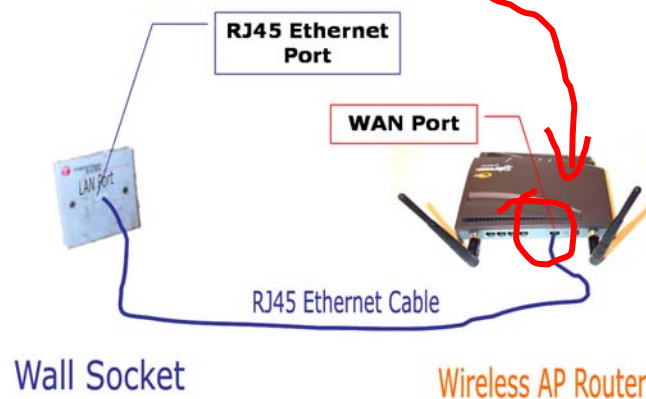

STEP 2 - Plug it straight into the WAN Port of the wireless AP Router.

First, remove the power supply of all devices and locate the RJ45 Ethernet cable that connects your PC and the RJ45 Ethernet Wall Socket. Unplug the cable from your PC and plug it straight into the WAN Port of the wireless AP Router.

Power up the AP Router.

Setting the Wireless AP Router for Automatic Configuration—DHCP

If you haven't set up your wireless PC client, we suggest you to work on it with the installation guide of “Building your 11/54Mbps High-Speed Home/ Office wireless network with a step-by-step ap-

proach” (Ref: DN-WLAN-02). You can find it at [Http://www.danets.com/ application_e.htm](http://www.danets.com/application_e.htm).

Once your wireless PC client is up and running, double click your web browser, press “Ctrl-L” together and key in the address 192.168.1.1, this is going to bring you to the “Login” of the Access Point Router. At default, skip the User-name and key in “admin” at the Password box. If you have changed the Password previously, make sure that you key in your own. Hit “Enter” to get to the SETUP page.


When the SETUP page pops up, choose “Automatic Configuration—DHCP” as the Connection Type. Leave the Host Name and Domain Home as blank unless you know exactly what to enter. Click “Apply” then “Continue”.

At the STATUS page, you will be able to see “Connected” with the IP and DNS addresses assigned by your office or campus LAN. Otherwise, check the cables carefully before making the reconnection.

Setting the Wireless AP Router for Static IP Configuration

If your office LAN does not assign IP and DNS addresses automatically when it detects a new network adaptor, you will need to assign your own set of IP addresses. In such situation. the technical jargon is known “DHCP Disabled from your office LAN”. Your office network administrator would probably have supplied you with a set of IP addresses for your PC. If not, ask for it because you can’t key in the IP addresses from nowhere.


When you get to the SETUP page of the wireless AP Router, choose “Static IP” as the Connection Type. Key in the IP, Subnet Mark, Gateway and DNS address obtained from your office network administrator. Click “Apply” then “Continue”.

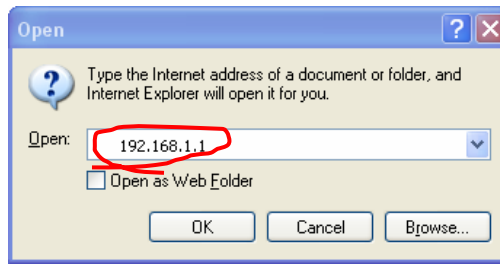


STEP 3 - To access the system administrator of the AP Router, open your Internet Explorer, press “Control-L” keys together and key in “192.168.1.1”, then press OK



STEP 4 - When this screen pops up, skip the User name, enter your Password (default as “admin”), then press OK

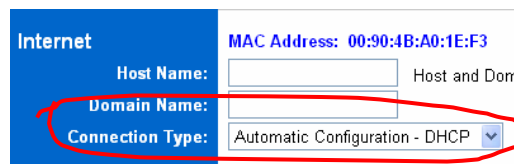

STEP 5 - For Dynamic IP only. Otherwise, go to step 7 for Static IP Configuration, Now, choose “Automatic Configuration—DHCP” as the Connection Type, then click “Apply”

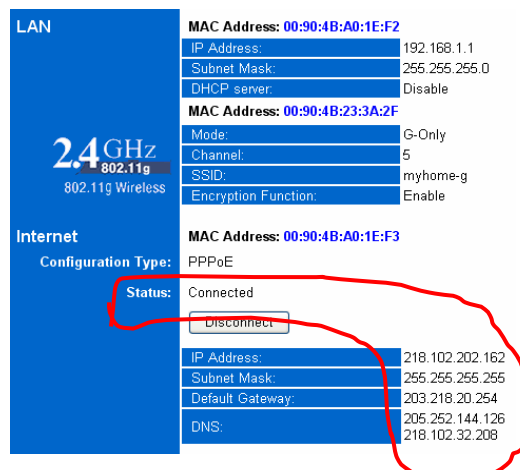

STEP 6 - The “Status” screen refreshes every six seconds. It shows a bunch of IP and DNS addresses if the AP router is connected to your office or campus LAN

For Dynamic IP Configuration, choose “Automatic Configuration—DHCP” as the Connection Type. Leave the Host Name and Domain Home as blank unless you know exactly what to enter.

At the STATUS page, you will be able to see “Connected” with your IP and DNS addresses. Otherwise, check the cables and the IP addresses carefully before making the reconnection. **d**

Internet: MAC Address: 00:90:4B:A0:1E:F3

Host Name: Host and Domain settings may be

Domain Name:

Connection Type: Static IP Select the type of connection.

IP Address: 218 . 102 . 202 . 162

Subnet Mask: 255 . 255 . 255 . 0

Default Gateway: 203 . 218 . 20 . 254

DNS(Required): 1: 205 . 252 . 144 . 126

2: 218 . 102 . 32 . 208

3: 0 . 0 . 0 . 0

STEP 7 - For “Static IP” configuration only. Now, key in the IP, Subnet Mask, Gateway and DNS addresses supplied by your office network administrator, then click “Apply”

LAN MAC Address: 00:90:4B:A0:1E:F2

IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

DHCP server: Disable

MAC Address: 00:90:4B:23:3A:2F

Mode: G-Only

Channel: 5

SSID: myhome-g

Encryption Function: Enable

Internet MAC Address: 00:90:4B:A0:1E:F3

Configuration Type: PPPoE

Status: Connected

Disconnect

IP Address: 218.102.202.162

Subnet Mask: 255.255.255.255

Default Gateway: 203.218.20.254

DNS: 205.252.144.126
218.102.32.208

STEP 8 - The “Status” screen refreshes every six seconds. It shows a bunch of IP and DNS addresses if the AP router is connected to your office or campus LAN

For Static IP Configuration, choose “Static IP” as the Connection Type. Key in the IP, Subnet Mark, Gateway and DNS address obtained from your office network administrator.

danets

S.Y. Wong CEng MIEE

DataCom Network Ltd.
1505 Ricky Centre
Kwun Tong
Hong Kong

Phone: +852 2951 0321
Fax: +852 3141 9209
Email: marcom@danets.com



We are on the web!

Please visit www.danets.com

In today's environment, it's all about getting back to the basics. We focus on our core competence to improve the fundamentals of personal mobile communications - unwiring the mobile terminals using "Carrier Class" technologies with fun and productivity.

We differentiate our products and services with competitive quality and price performance, plus a deep understanding of the RF (wireless) and networking technologies in our planning and installation service offerings. How do we do that? We work directly with the manufacturers to obviate gaps in our supply chain, gain the economy of scale so that we can get you the cost benefits and the after-sales services.

For further information, please call +852 2951 0321 or email: marcom@danets.com

The registered trademarks belong to the respective companies.

Specifications are subject to change without notice.

Office and Campus Wireless Broadband Setup Quick Reference

Special points of interest

- Showing you the physical cable connection of the wireless AP Router and the office or campus LAN port
- Setting the wireless AP Router for either the "Automatic Configuration—DHCP" or "Static IP" according to your wired LAN configuration
- Verifying the broadband connection

